

30

STATION POST	
CAT. NO. 14PA49	
230 kV	1050 kV BIL
TR. NO. 176	
SOLID CORE PORCELAIN	

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 198

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	1,170
TENSION STRENGTH	LB	25,000
TORSION STRENGTH	IN-LB	90,000
COMPRESSION STRENGTH	LB	75,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	kV	1210
60 HERTZ WITHSTAND-WET	kV	455
IMPULSE WITHSTAND	kV	1050


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.	kV	146
MAXIMUM RIV @ 1000 kHz	μV	500

PACKING INFORMATION

NET WEIGHT , COLUMN	LB	275
PACKED WEIGHT , COLUMN	LB	305
NO. IN STANDARD PACKAGE		1

4 HOLES
 $\frac{5}{8}$ -11 +.015" ON 5" B.C.

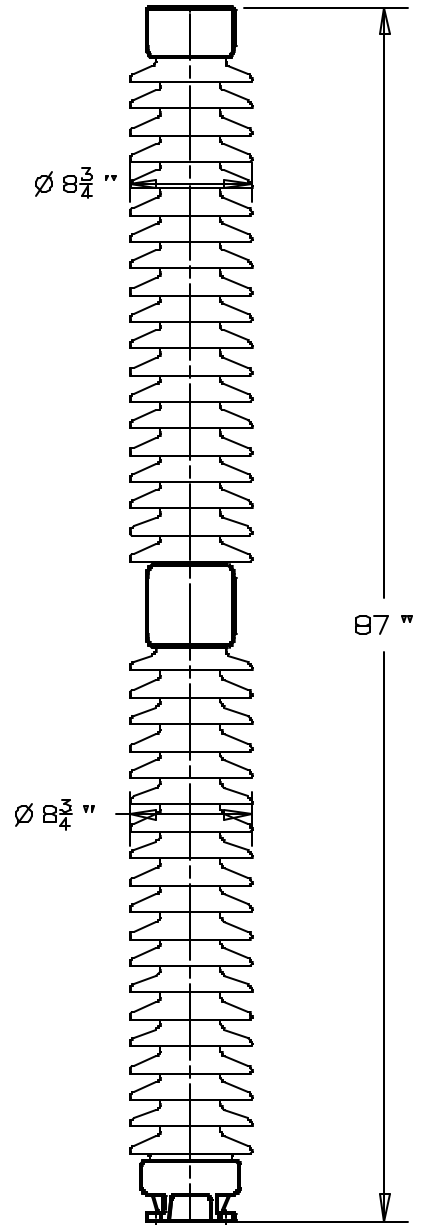

4 SLOTS $\frac{11}{16}$
 WIDE ON A 5" B.C.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

09-11-03

TM



Victor Insulators, Inc.

260 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585)924-2127

14PA49