

30

STATION POST	
CAT. NO.	1770
69kV	350kV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 72

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 3,000  
 CANTILEVER STRENGTH, UNDERHUNG LB 3,000  
 TENSION STRENGTH LB 25,000  
 TORSION STRENGTH IN-LB 40,000  
 COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS. KV 390  
 IMPULSE WITHSTAND KV 350  
 60 HERTZ WITHSTAND-WET kV5 145

RADIO INFLUENCE VOLTAGE DATA

RIV TEST VOLTAGE TO GROUND kV 44  
 MAXIMUM RIV @ 1000 KHZ  $\mu$ V 200

PACKING INFORMATION

NET WEIGHT, STACK LB 110  
 PACKED WEIGHT, STACKED LB 120  
 NO. IN STD. PACKAGE 1

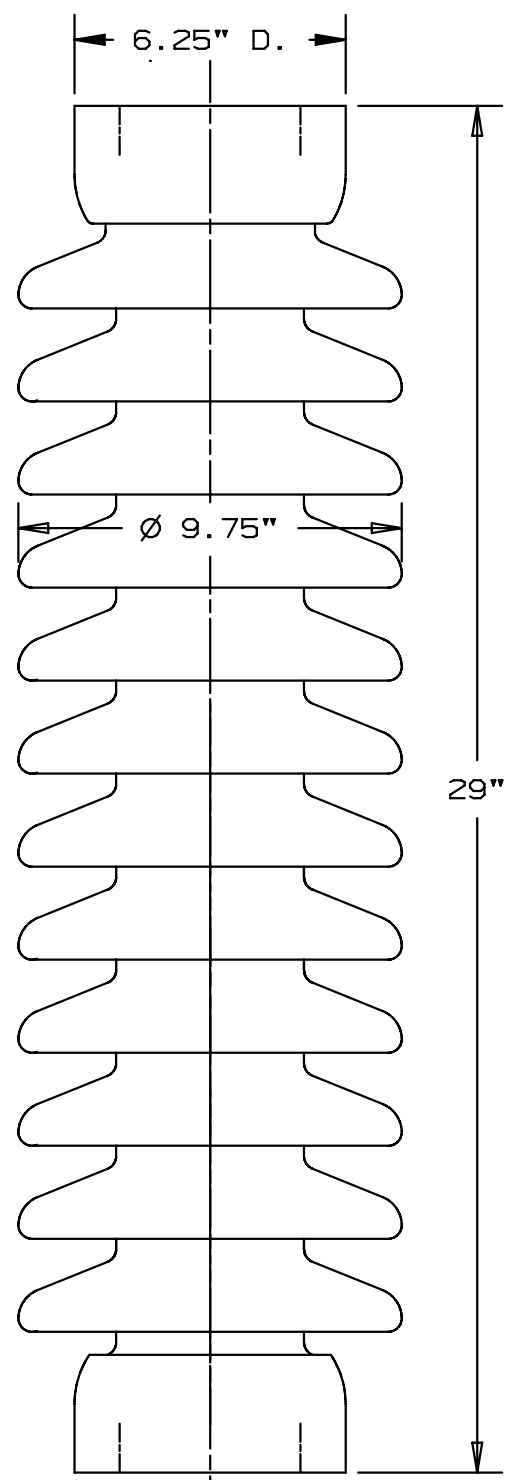

4 HOLES EACH END  
 .625" - 11 + .015" ON 5" B.C.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

REDRAWN 5-15-97 MM

	Victor Insulators, Inc.
	280 MAPLE AVENUE
	VICTOR, NEW YORK 14564
	TELEPHONE: (585)924-2127

1770