

30

LINE POST

CAT. NO. 2137

27 kV

"C" NECK

- I ENG. MGR
- I ENG
- PURCH.
- I MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- I EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 15  
 DRY ARCING DISTANCE IN 7.75

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,500

ELECTRICAL VALUES

60 HERTZ FLASHOVER-DRY kV 95  
 60 HERTZ FLASHOVER-WET kV 65  
 IMPULSE FLASHOVER -POS. kV 135  
 IMPULSE FLASHOVER -NEG. kV 190


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 20  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 50

PACKING INFORMATION

NET WEIGHT PER 100 LB 969  
 PACKED WEIGHT PER 100 LB 1,044  
 NO. IN STANDARD PACKAGE 3

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

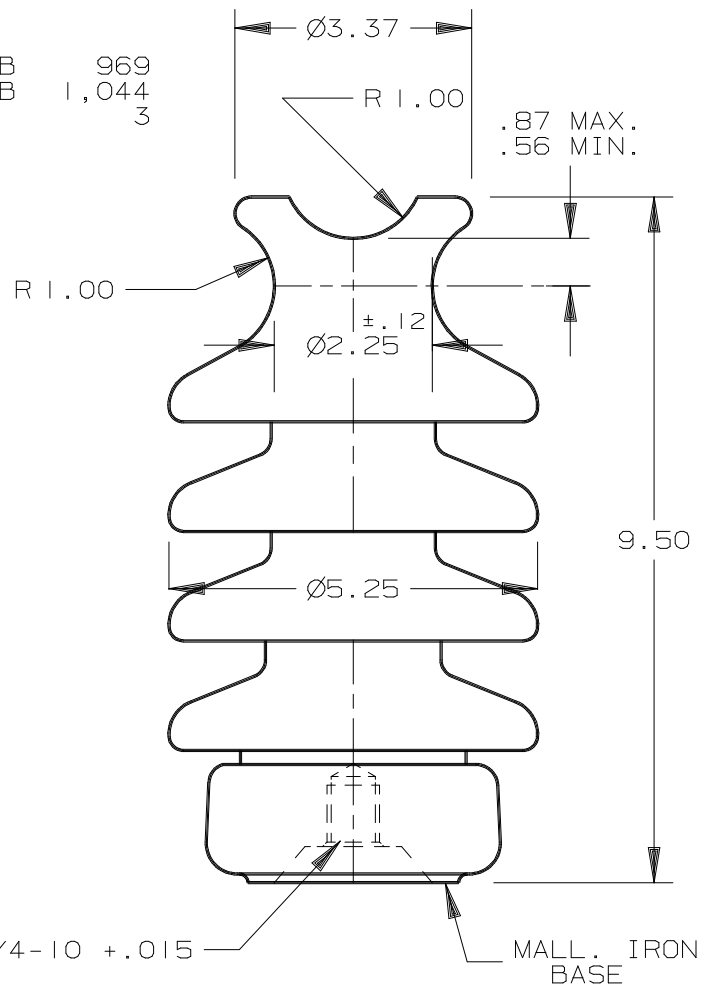

FILE: 2137



Victor Insulators, Inc.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716) 924-2127

2137

01-04-01

TP PP AS

SUPERSEDES 2137 DATED 10-18-89