

30

STATION POST

CAT. NO. 1461

138 kV

650 kV BIL

- 1 ENG. MGR.
- 2 ENG.
- 1 MKTG.
- 1 EL. LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 155

MECHANICAL VALUES

CANTILEVER STRENGTH LB 4,100  
 TENSION STRENGTH LB 40,000  
 TORSION STRENGTH IN-LB 120,000  
 COMPRESSION STRENGTH LB 120,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 710  
 60 HERTZ WITHSTAND-WET kV 275  
 IMPULSE WITHSTAND kV 650


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 88  
 MAXIMUM RIV @ 1000 kHz  $\mu$ V 200

PACKING INFORMATION

NET WEIGHT, COLUMN LB 300  
 PACKED WEIGHT, COLUMN LB 318  
 NO. IN STANDARD PACKAGE 1

4 HOLES  
 3/4-10 +.015 ON 7" B.C.

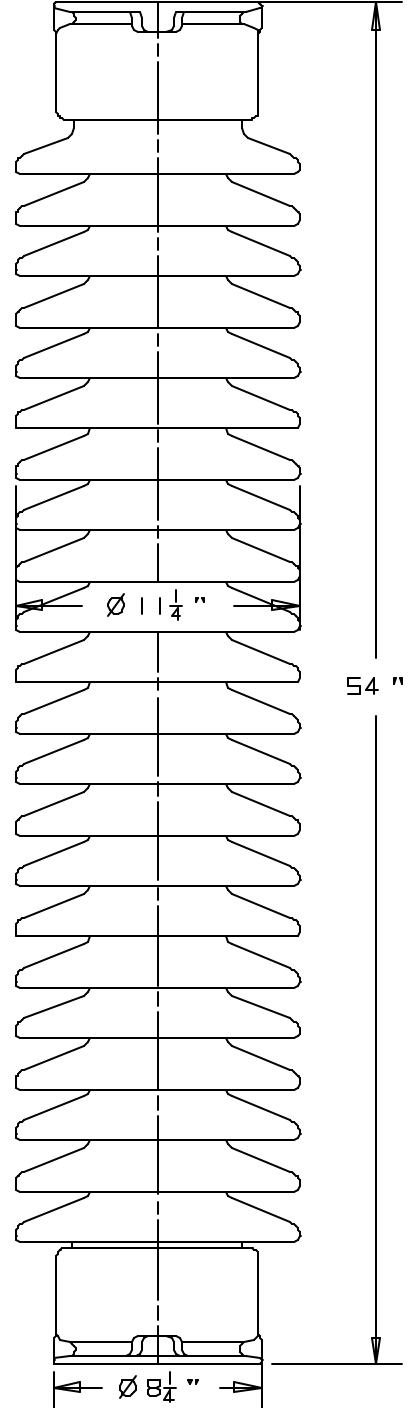

4 HOLES  
 3/4-10 +.015 ON 7" B.C.

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 1461

09-26-05

TM

AS



Victor Insulators, Inc.

280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (565) 924-2127

1461