

30

STATION POST

CAT. NO. 1626

115 kV

550 kV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 145

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,700
 TENSION STRENGTH LB 20,000
 TORSION STRENGTH IN-LB 40,000
 COMPRESSION STRENGTH LB 60,000

4 HOLES EACH END
 $\frac{5}{8}$ -11 +.015" ON 5" B.C.

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS. kV 610
 60 HERTZ WITHSTAND-WET kV 230
 IMPULSE WITHSTAND kV 550

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 73
 MAXIMUM RIV @ 1000 kHz μ V 200

PACKING INFORMATION

NET WEIGHT , EACH LB 152
 PACKED WEIGHT , EACH LB 172
 NO. IN STANDARD PACKAGE 1

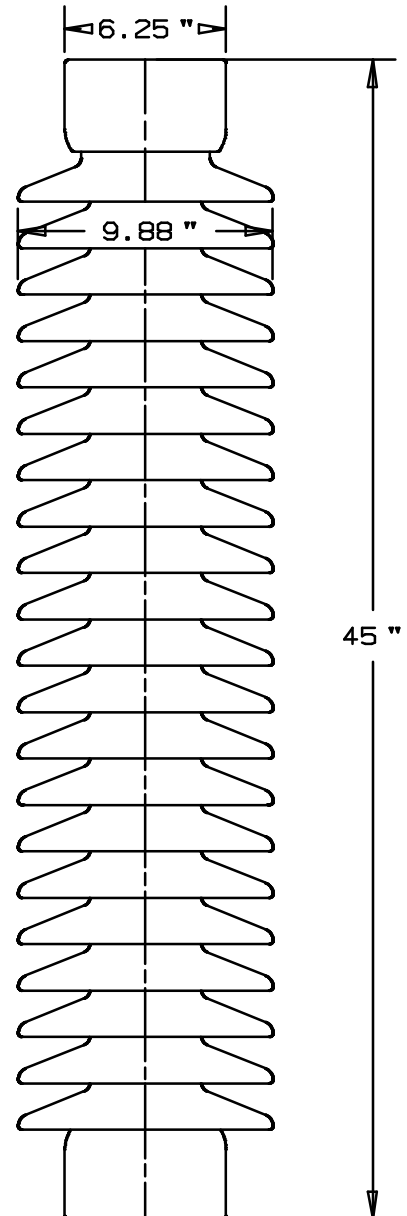

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED, OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 1626



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

1626

02-22-02

TM

AS