

30

STATION POST
CAT. NO. 1768
23kV 150kV BIL
TR. NO. 227

DIMENSIONS

LEAKAGE DISTANCE IN 24

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 4,000
 CANTILEVER STRENGTH, UNDERHUNG LB 4,000
 TENSION STRENGTH LB 20,000
 TORSION STRENGTH IN-LB 16,000
 COMPRESSION STRENGTH LB 20,000

ELECTRICAL VALUES


IMPULSE FLASHOVER - POS. kV 170
 60 HERTZ WITHSTAND - WET kV 60
 IMPULSE WITHSTAND kV 150

RADIO INFLUENCE VOLTAGE DATA

RIV TEST VOLTAGE TO GRD. kV 15
 MAX. RIV @ 1000 kHz μV 100

PACKING INFORMATION

NET WEIGHT, EACH LB 54
 PACKED WEIGHT, EACH LB 60
 NO. IN STANDARD PACKAGE 1

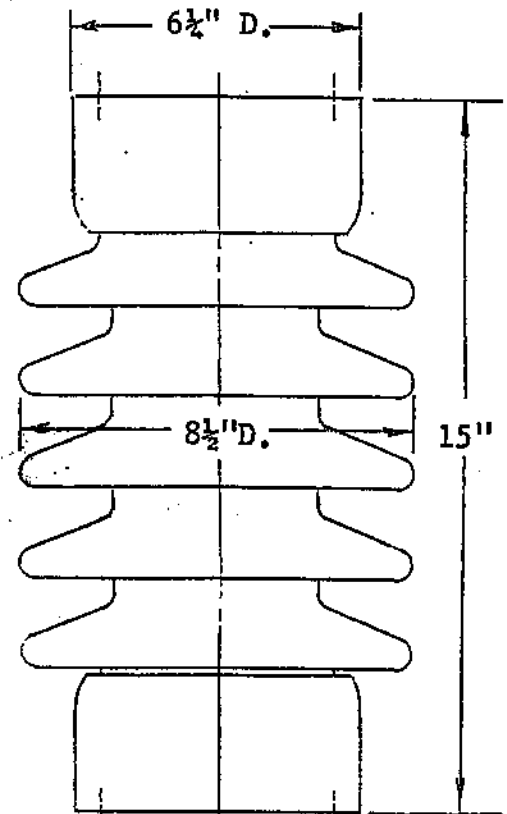

4 HOLES EACH END
 5/8-11+.015" on 5" B.C.

- Eng. Mgr. 1
- Eng. 2
- Purch.
- Mktg. 1
- Supt.
- Cost
- Prod.
- Insp.
- Glazing
- Bushing
- Making
- Shp
- Assem.
- Model
- Mach.
- 45
- Tooling
- Cer. Lab.
- El. Lab. 1
- Q.A.

This drawing is the property of Victor Insulators, Inc. and contains proprietary and confidential information which must not be duplicated, used, or disclosed other than as expressly authorized by Victor Insulators, Inc.

FILE 1768

DWN. G.J.R.
7-1-84
APP. <i>AES</i>

	Victor Insulators, Inc.
	280 Maple Avenue
	Mt. P.O. Box B, Victor, New York 14564
	Telephone: (716) 924-2127

1768
